


UGS-D 防腐型彩色石英玻璃液位计

UGS-D ANTI-CORROSIVE COLOR QUARTZ GLASS LIQUID LEVEL GAUGE

适用范围 SUITABLE RANGE

UGS-D防腐型彩色石英玻璃液位计适用于腐蚀性介质且工作温度又较高场合的液位测量。由于采用不锈钢内衬聚四氟乙烯三通和直管组合，可靠性高，缺点：上下有测量盲区。

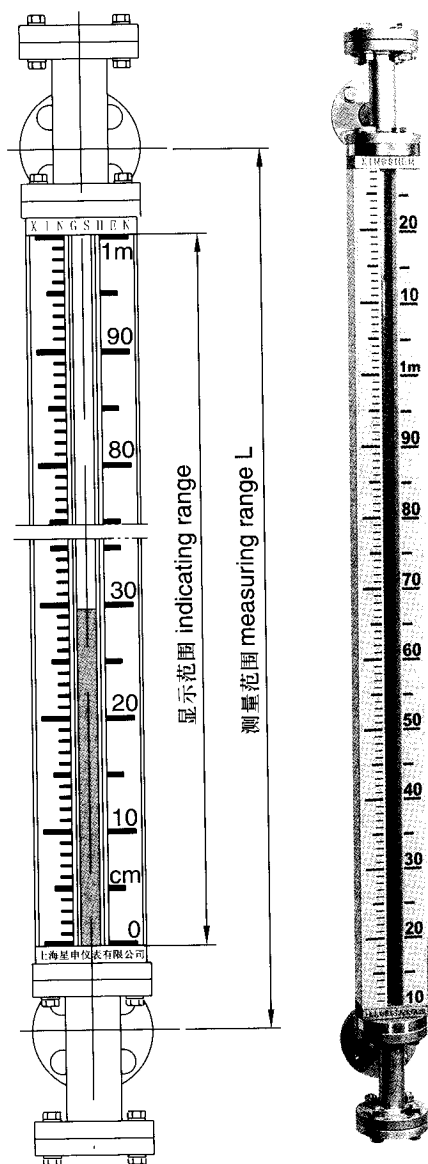

UGS-D 型

UGS-D anti-corrosive color quartz glass liquid level gauge is suitable for corrosive medium at even higher operating temperature. The level gauge is combined with stainless steel three way pipe and straight pipe with PTFE lining, so it is reliable in operation. But at same time, it is provided with disadvantage that some blind areas exist at top and bottom.

主要技术参数 SPECIFICATIONS

工作压力 operating pressure: 1.6MPa, 2.5 MPa

工作温度 operating temperature: -20~200℃

测量范围 measuring range L:

(两法兰间中心距CL) 300、500、800、1100、1400、1700、2000mm。

显示范围 indicating range:

测量范围measuring range L-200mm

过程连接 process connection:

DN25(或DN20、DN40)凸面(或平面)，法兰标准HG20592~20635-97，其它法兰标准请用户注明。Convex flange as above, other on request.

接液材质 contacting material:

PTFE;

99.99%SiO₂石英管quartz tube

可选项 options:

蒸汽加热夹套with steam heating jacket:

工作压力operating pressure 1.0MPa,

接口尺寸joint G1/2" 外螺纹outer thread

循环水加热夹套with cycling water heating jacket:

工作压力operating pressure 1.0MPa,

接口尺寸joint G3/4" 外螺纹outer thread

电伴热with electrical heating equipment

订货须知 order information

型号model;

工作压力operating pressure;

工作温度operating temperature;

测量范围measuring range;

过程连接process connection